

O-Saft and docker Container




program execution


host

docker container


execute all in host (without docker)

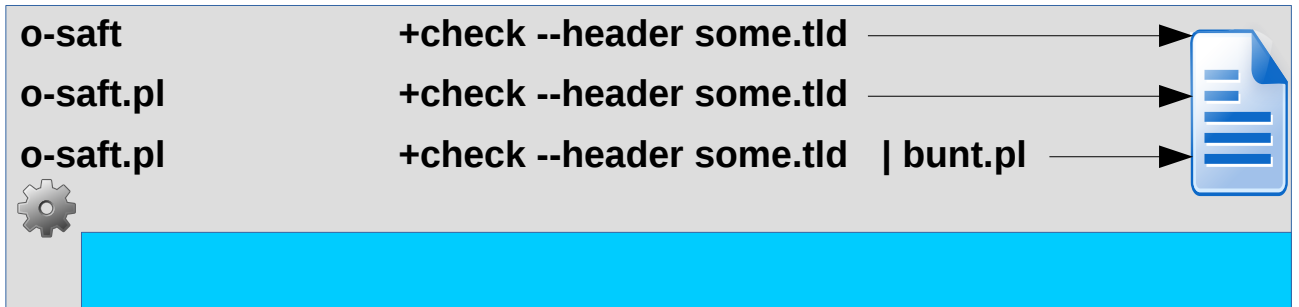


execute o-saft.pl in docker, output to host

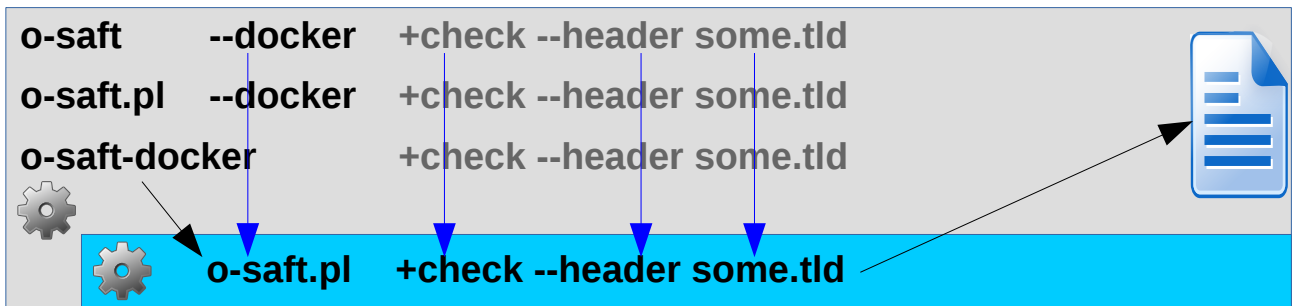


execute o-saft.pl in docker, output to host, postprocess in host

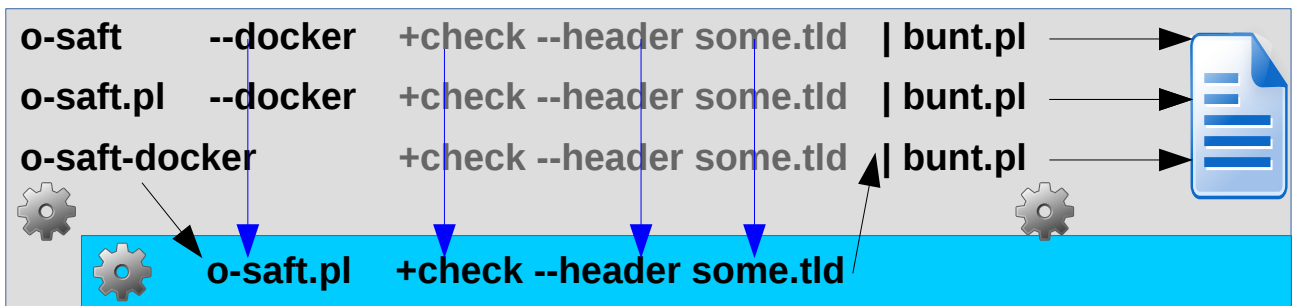

execute o-saft.pl and postprocess in docker, output to host

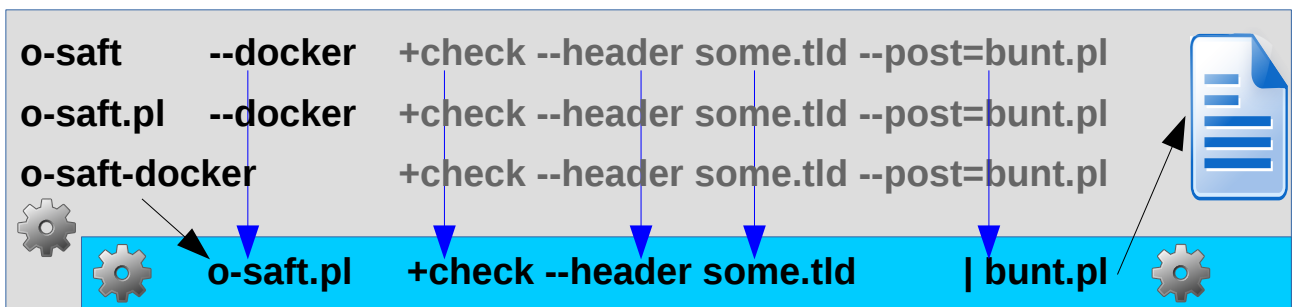


execute o-saft.pl and postprocess in docker, output in docker

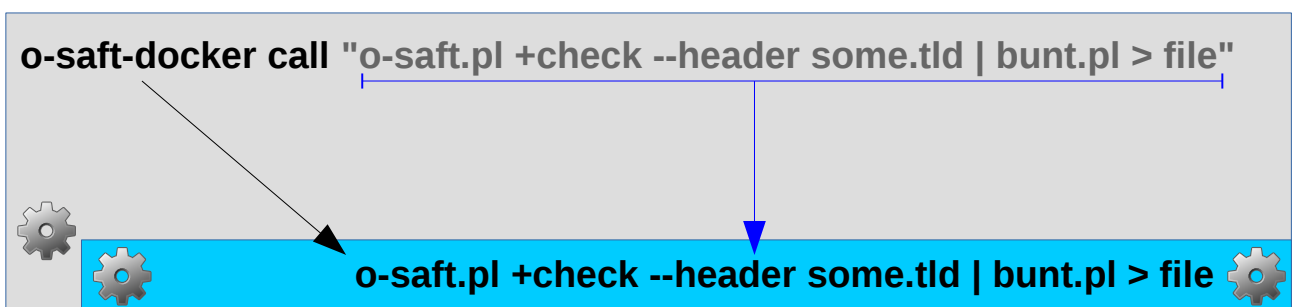


(not recommended)

O-Saft GUI and docker Container


 program execution




execute GUI in host, o-saft.pl in host (without docker)

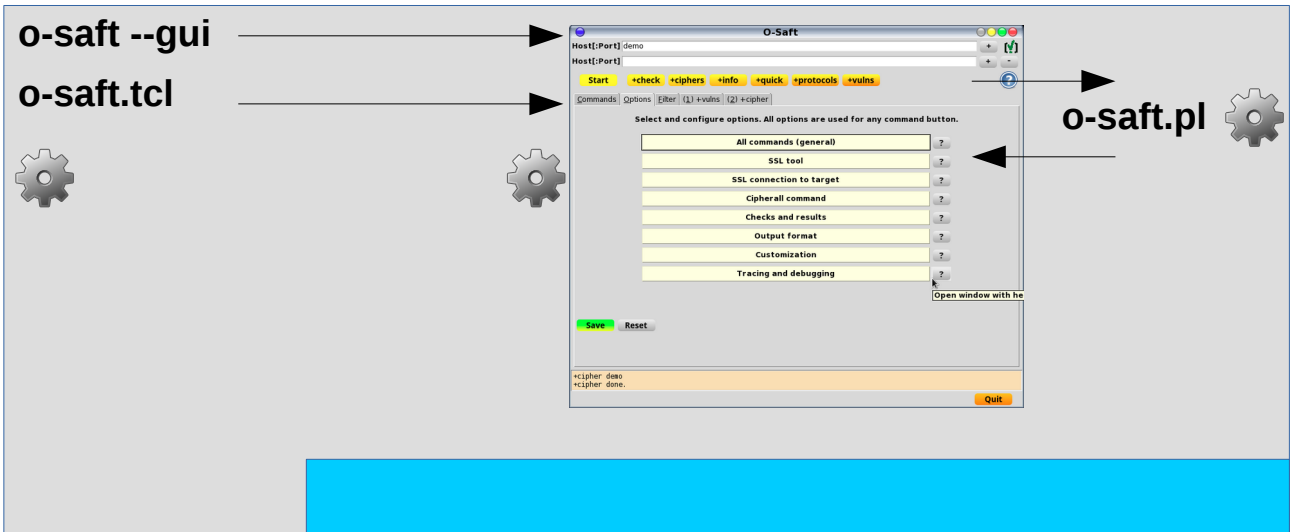

execute GUI in host, o-saft.pl in docker, output to host

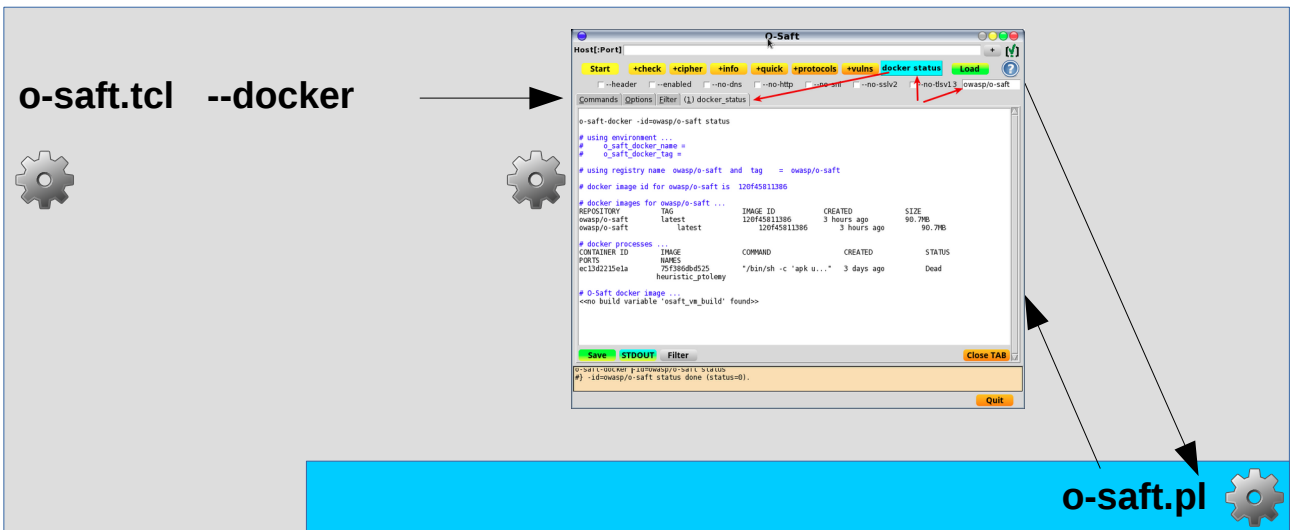

execute GUI and o-saft.pl in docker, output (display) to host

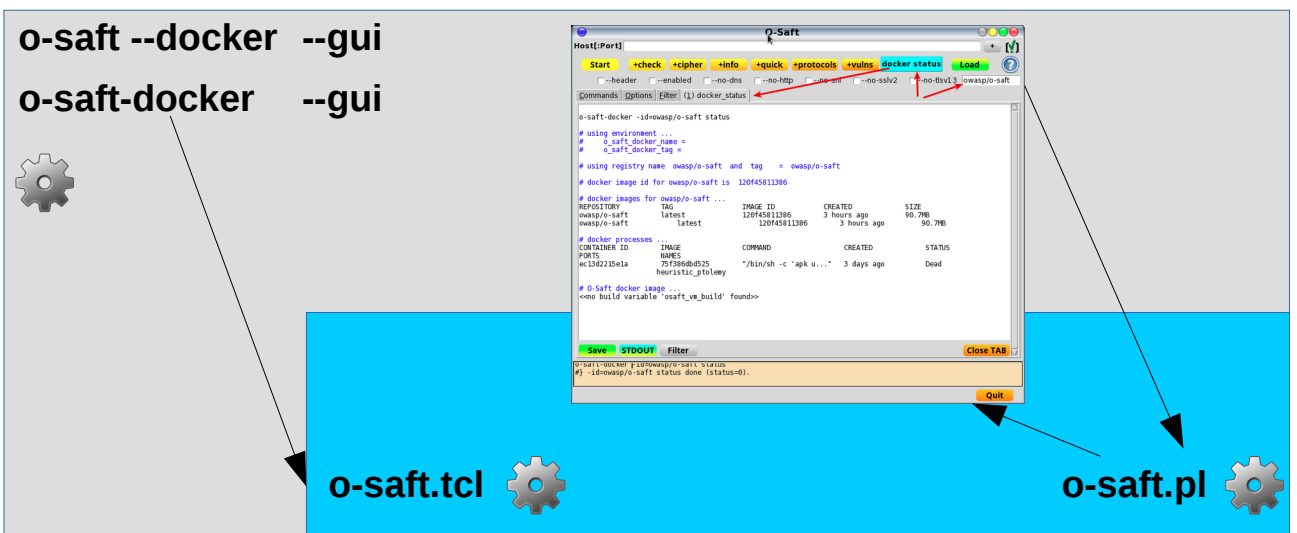

(docker with xvfb, tcl, tk)